


A MULTI-PRODUCT ENGINEERING COMPANY

HOT AIR JACKET

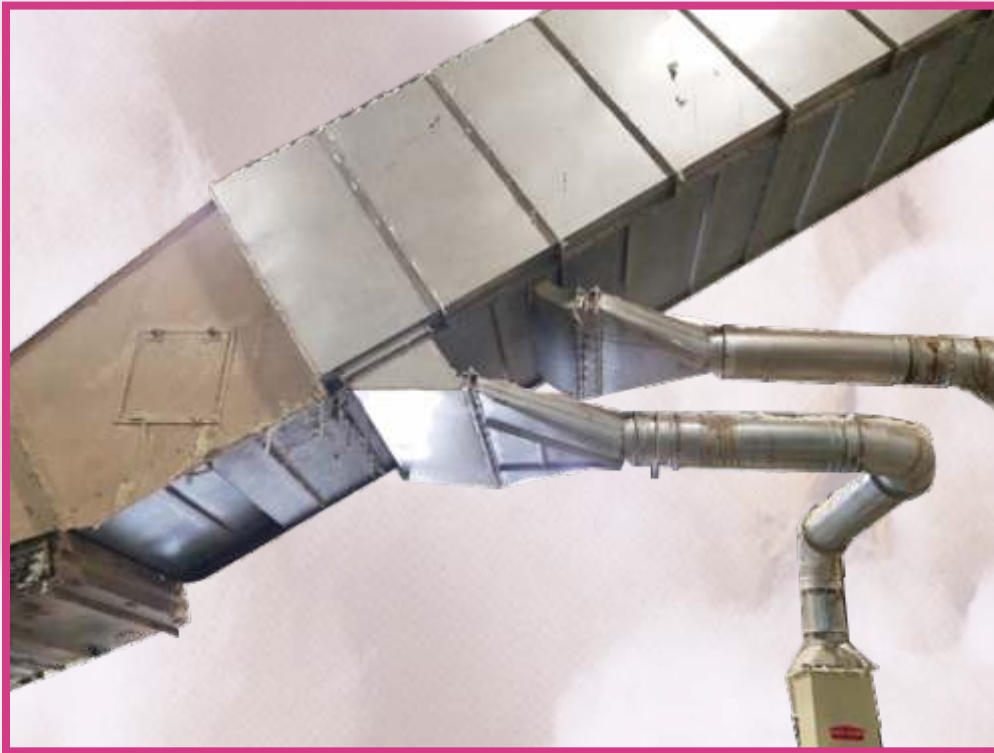

KEY POINTS :

Its main function is to provide uniformity of temp. at lint slide.

It consist of SS panels connected to each other in such a way that hot air used to flow from the bottom hopper.

It is used to carry hot air from the heater.

Air is entering from the bottom hopper and flows towards the battery condenser and after that it gets mixed inside the lint slide.

It also helps to nourish the humid air temp.

Its size changes based on lint slide and capacity of the burner.